


DAR 71/4 2,2

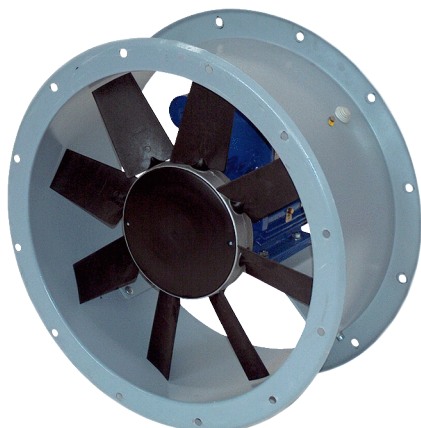

Short description

Axial duct fan, DN 710, three-phase AC, nominal power 2.2 kW

Application examples

Production facility, Workplace, Commercial premises, Industrial building

Article number 0073.0130

Technical data

Air flow volume	23.119 m³/h
Rotating speed	1.440 1/min
Impeller type	axial
Speed controllable	✓
Reversing capacity	–
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	2.200 W
I _{nom}	1,44 A
Degree of protection	IP 55
Insulation class	F
Pole-changeable	–
Installation site	Duct
Installation position	Horizontal / Vertical
Housing material	Sheet steel with epoxy coating
Impeller material	Polyamide
Colour	grey
Weight	57 kg
Weight including packaging	62 kg
Nominal size	710 mm
Width	810 mm
Height	520 mm
Depth	810 mm
Width with packaging	830 mm
Height with packaging	600 mm
Depth with packaging	830 mm
Airstream temperature at I _{Max}	-10 °C up to 50 °C
PTC DIN 44082	M 100

DAR 71/4 2,2

Packing unit	1 piece
Range	C
GTIN (EAN)	4012799731306

Technical data according to ErP in Best Efficiency Point (BEP)


Total efficiency η	42,8 %
Measurement category	C
Efficiency category	static
Efficiency level N	47,2
VSD necessary	no
Year of manufacture	see rating plate
Manufacturer's name / official registration number / manufacturer's place of establishment	Maico Elektroapparate-Fabrik GmbH / Freiburg registration court, HRB 601233 / Villingen-Schwenningen
Art. No.	0073.0130
P_{BEP} / Air volume $_{BEP}$ / $P_{fs, BEP}$	2,032 kW / 15.624 m ³ /h / 200,5 Pa
n_{BEP}	1.440 1/min
Specific ratio	≈ 1
Information about dismantling and disposal	see mounting instructions
Information about installation, operation and repairs	see mounting instructions
I_{BEP}	4,8 A
Sound power level L_{WA7}	87 dB(A)

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
$L_{WA5, S5}$ (dB(A))	65	72	77	79	81	81	81	75	87

L_{WA5} = free inlet sound power level in dB.

Characteristic curve

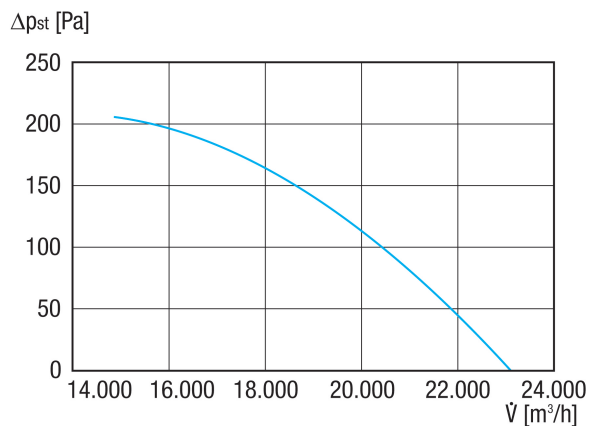

DAR 71/4 2,2

Dimensioned drawing [mm]

