




Typ: **UNOR 50-315-4E.3EF**

Art.-č.: F08-31501



**Charakteristika:**

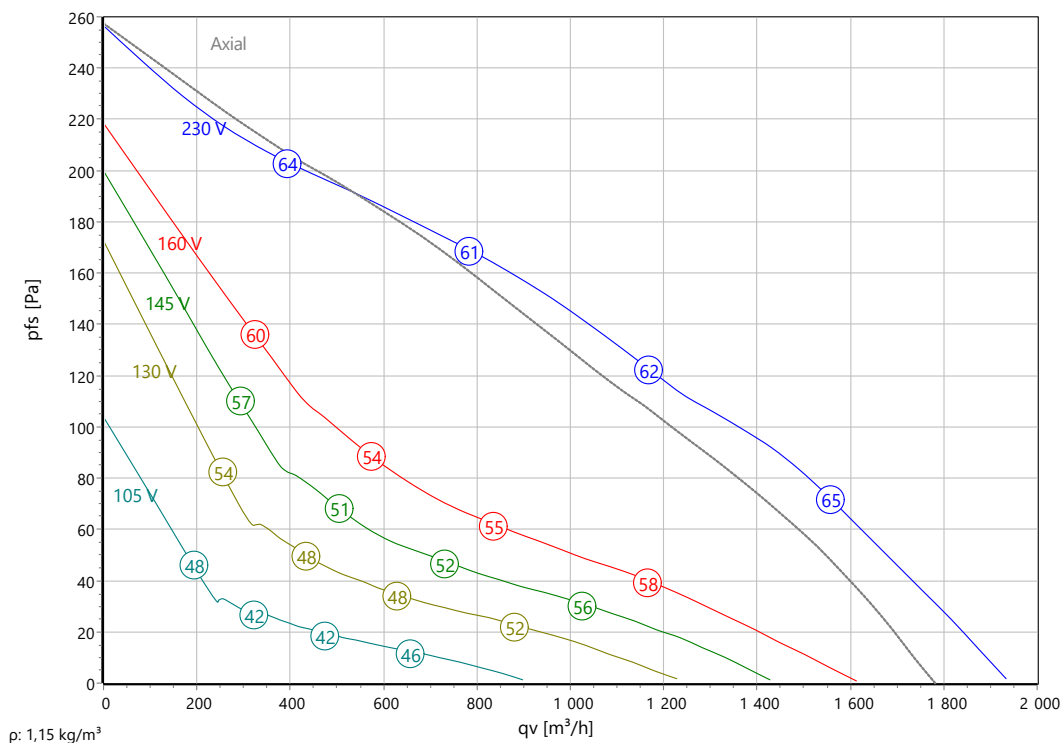

**ErP - Data:**

(EU) Nr. 1253/2014 (Lot6)		
$q_v$	1036	m³/h
$p_{fs}$	147	Pa
$\eta_{fs}$	34,1	%
$P_e$	0,12	kW
$n$	1200	U/min
$N$	47	N
$v$	0,711	m/s
$\eta_{fs}$ Lot11	0	%

**Jmenovité údaje:**

U [V]	f [Hz]	C [µF]	$P_e$ [kW]	$I_N$ [A]	$n_N$ [U/min]	$t_R$ [°C]	$k_{10}$ [m²/s/h]	$I_A / I_N$	IP	m [kg]
1~230	50	3,5	0,124	0,56	1200	-20 .. +60	90	1,6	IP 44	30

**Hlukové údaje:**

Frekvence	$\Sigma$	63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Vzdálenost	1 m	4 m
LwA(A,in) [dB(A)]	-7	-35	-21	-8	-4	-7	-8	-12	-18	LpA(A,in) [dB(A)]	-14	-24
LwA(A,out) [dB(A)]		-34	-20	-5	-4	-7	-12	-19	-24	LpA(A,out) [dB(A)]	-7	-17
LwA(D,cas) [dB(A)]	-20	-16	-6	-2	-12	-17	-23	-33	-37	LpA(D,cas) [dB(A)]	-27	-37

Křivka výkonu vzduchu s radiálním průtokem